


Standard Light Mouldings

OregonDoor wood light mouldings (also known as stops or beads), are available as follows:

- Factory Installed (with factory installed glazing)*
- Installed One Side (with the other side precut for field installation after glazing)**
- Shipped Loose (for field installation)

Field fitting of glass, glazing, and stops is the responsibility of the installer. Use of glazing compound or caulking is required. All standard profiles have a tolerance of ± 0.005 . Glass may be substituted with $\frac{3}{8}$ " thick matching specie flat panel.

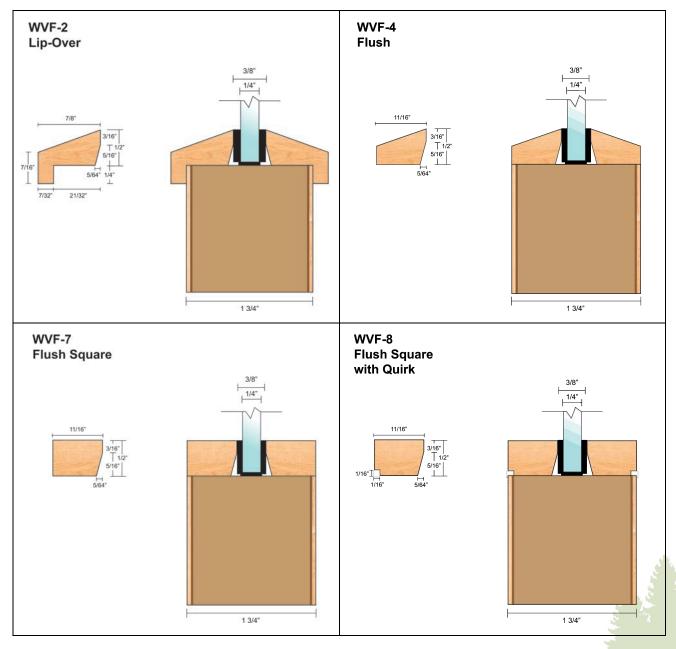

Additional moulding profiles are available by special order. Please contact the factory for details.

*Nail holes filled with factory finish

**Nail holes not filled